


## LG Custom series




Various types of loaders can be optional:  
Grasping wooden fork, grab fork, reed fork, folder clip, fork, etc. with a fork

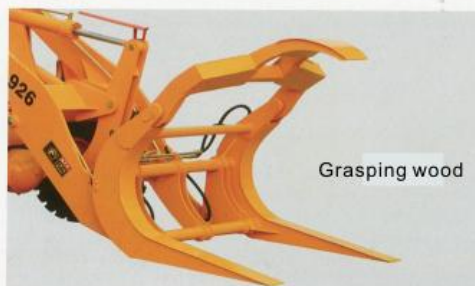

Grasping wood



Reed fork

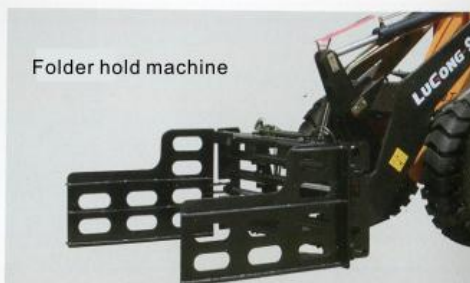

Folder hold machine



Snowmoving



Push the snow shovel

**All kinds of high-unloading grain series**



Discharge height	m	m
LG918	3.5	4.5
LG920	3.5	4.5
LG926	3.8	4.5
LG928	3.8	4.5
LG930	3.8	4.5
LG933	3.8	4.5

**Various downhole machine series**







## LG-938

Continuously variable series

### Technical Parameters

Rated loading weight (kg)	3000
Rated bucket capacity (m <sup>3</sup> )	1.5
Maximum discharge height (mm)	3500
Minimum turning radius (m)	5.0
Diesel Engine Model	CA6110
Diesel power (kw)	92
Tire type	17.5-25



## LG-933/930

Continuously variable series

### Technical Parameters

Model	LG933	LG933
Rated loading weight (kg)	2600	2200
Rated bucket capacity (m3)	1	1
Maximum discharge height (mm)	3500	3500
Minimum turning radius (m)	5.0	5.0
Diesel Engine Model	YT4B27-24	YN38GBZ
Diesel power (kw)	85	76
Tire type	16/70-24	16/70-20



## LG-928

Continuously variable series

### Technical Parameters

Rated loading weight (kg)	2000
Rated bucket capacity (m <sup>3</sup> )	0.8
Maximum discharge height (mm)	3300
Minimum turning radius (m)	4.5
Diesel Engine Model	HDWZG-55
Diesel power (kw)	60
Tire type	16/70-20





## LG-926

Continuously variable series

### Technical Parameters

Model	LGA3926	LGA5926
Rated loading weight (kg)	2000	2000
Rated bucket capacity (m <sup>3</sup> )	0.8	0.8
Maximum discharge height (mm)	3200	3200
Minimum turning radius (m)	4.3	4
Diesel Engine Model	HF4102	YN27GBZ
Diesel power (kw)	47	58
Tire type	16/70-16	16/70-16

## LG-918

Continuously variable transmission /  
mechanical transmission

### Technical Parameters

Rated loading weight (kg)	1800
Rated bucket capacity (m3)	0.7
Maximum discharge height (mm)	3200
Minimum turning radius (m)	4
Diesel Engine Model	4DW91-45
Diesel power (kw)	37
Tire type	1400-16





## LG-916

Mechanical transmission series

### Technical Parameters

Rated loading weight (kg)	1600
Rated bucket capacity (m3)	0.6
Maximum discharge height (mm)	2900
Minimum turning radius (m)	4.0
Diesel Engine Model	4DW91-45
Diesel power (kw)	37
Tire type	825-16



## LG-912

Mechanical transmission series

### Technical Parameters

Rated loading weight (kg)	1200
Rated bucket capacity (m <sup>3</sup> )	0.5
Maximum discharge height (mm)	2800
Minimum turning radius (m)	4.0
Diesel Engine Model	2JD32/2102
Diesel power (kw)	23.5
Tire type	825-16



## Dump truck series

### Technical Parameters

Model	Fc10	Fc15	Fc18
Rated loading weight (kg)	1000	1500	1800
Turning radius (m)	4.5	4.5	4.5
Diesel Engine Model	ZS1100	ZS1100	ZS1105
Diesel power (kw)	11.03	11.03	13
Hopper Capacity (m3)	0.5	0.75	0.90



## Tricycle series

FC series of dump trucks used in Beijing 130 front axle drive axle, power Changzhou ZS1100 (15 hp) diesel engine, gearbox with Taishan 12 tractors Transmission design transformation.